ADDS

BY BOUNDLESS TECHNOLOGIES

ADDS 60 Video Display Terminal

Wyse 50, 50+ and 60 VDT emulation set

Best UNIX compatibility and Video performance in a 14" monochrome Terminal

High reliability backed by our 3 year warranty

Designed and manufactured in the USA

No matter what the operating environment, the ADDS 60 will be right at home. The ADDS 60 emulation set includes the Wyse WY-50/50+, WY-60, DEC VT-100, VT-220, VT 320 and the ADDS Viewpoint and PC-Term. The ADDS 60 is an ideal solution for customers using Wyse display terminals in legacy applications.

The ADDS 60 has advanced data access, data manipulation and display features, including cut and paste. The terminal features selectable refresh rates up to 100Hz for clear, flicker free viewing and an ISO 9241.3 compliant mode to reduce operator eye strain.

The ADDS 60 is offered with a choice of keyboards that includes PC 104 and ANSI keyboards.

Built in the Boundless "JIT" manufacturing facility in western NY allows rapid delivery of any terminal in any configuration. You can select the ADDS 60 of your choice in any phosphor color with any keyboard with the assurance that your order will be delivered quickly.

Boundless backs its ADDS 60 with a money back guarantee and a 3 year warranty.

Our focus on providing custom desktop solutions to our customers has made Boundless the client choice of every major server manufacturer for the last 30 years.

Boundless Technologies 1-800-231-5445

ADDS

BY **BOUNDLESS TECHNOLOGIES**

ADDS 60
Video Display Terminal

Display Features:
◇ 14" Flat face, reduced glare, high resolution screen
◇ Bezel to Bezel overscan
◇ 60, 71, 82 and 100 hz selectable refresh rates for clear flicker free viewing
◇ Choice of Green, Amber or White phospher
◇ 26,30,or 52 lines with top and/or bottom status lines
◇ 80 or 132 columns
◇ 10 pages of memory
◇ Variable-speed smooth scroll
◇ Double high, double wide characters
◇ Selectable screen saver

Desk Accessories:
◇ Calculator
◇ Calendar
◇ Clock
◇ ASCII Chart

Communications:
◇ Full/half duplex
◇ Local block
◇ Monitor mode
◇ Serial host Port
  - RS-232C main host
  - DTE, DB 25 female
  - up to 134.4k baud
◇ Serial Auxilary Port
  - RS-232 bi-directional serial port
  - DCE, DB 25 female
  - Up to 38.4k baud
◇ Parallel Printer Port
  - IBM PC and Centronic compatable
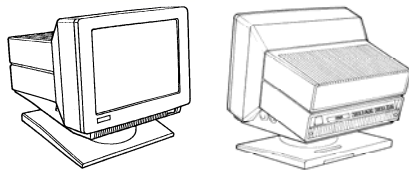◇ Optional Ethernet
  - 10BaseT TCP/IP

Terminal Emulations:
◇ ADDS Viewpoint
◇ VT 100
◇ VT 220
◇ VT 320
◇ Wyse 50
◇ Wyse 50+
◇ Wyse 60
◇ TVI 925
◇ SCO Console
◇ BBS ANSI
◇ AT 386

Regulatory Agencies:
◇ UL, cUL
◇ TUV
◇ FCC-B,
◇ CE
◇ MPR-II
◇ DHHS
◇ VCCI

Power:
◇ 90-264 VAC, 47-63 Hz
◇ .50-.20a (max) operating