

# OVERVIEW

Compaq ProLiant 3000R


## BENEFITS AT A GLANCE

- Space-saving rack-mountable form factor
- 300- and 333-MHz Intel Pentium® II processor (dual processor capability)
- 512-KB level 2 writeback cache per processor
- I<sub>2</sub>O Connector
- Highly Parallel System Architecture for improved system bandwidth
- ECC-protected memory bus and cache
- 64-MB of ECC EDO memory expandable to 512 MB and 3 GB<sup>1</sup>
- Five PCI and three shared PCI/EISA slots (eight total slots)
- Internal mass storage capacity up to 109.2 GB
- Netelligent 10/100 TX PCI UTP Controller
- Integrated Dual Channel Wide-Ultra SCSI-3 Controller
- Integrated Remote Console (IRC)
- Automatic Recovery Server-2 (ASR-2)
- Integrated Management Display (IMD)
- 500/750 Watt Hot Pluggable Power Supply with optional Hot-Pluggable Redundant Power Supply (RPS)
- Preinstalled 16X Max<sup>2</sup> CD-ROM Drive IDE
- Compaq Insight Manager and SmartStart
- Protected by a three-year on-site limited warranty and extended Pre-Failure Warranty<sup>3</sup> which covers Pentium II processors, memory and disk drives, as well as a wide range of Compaq Services.

<sup>1</sup> ProLiant 3000 6/333 only.

<sup>2</sup> Data transfer rates will vary from 150 KB/s to 2400 KB/s.

<sup>3</sup> Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

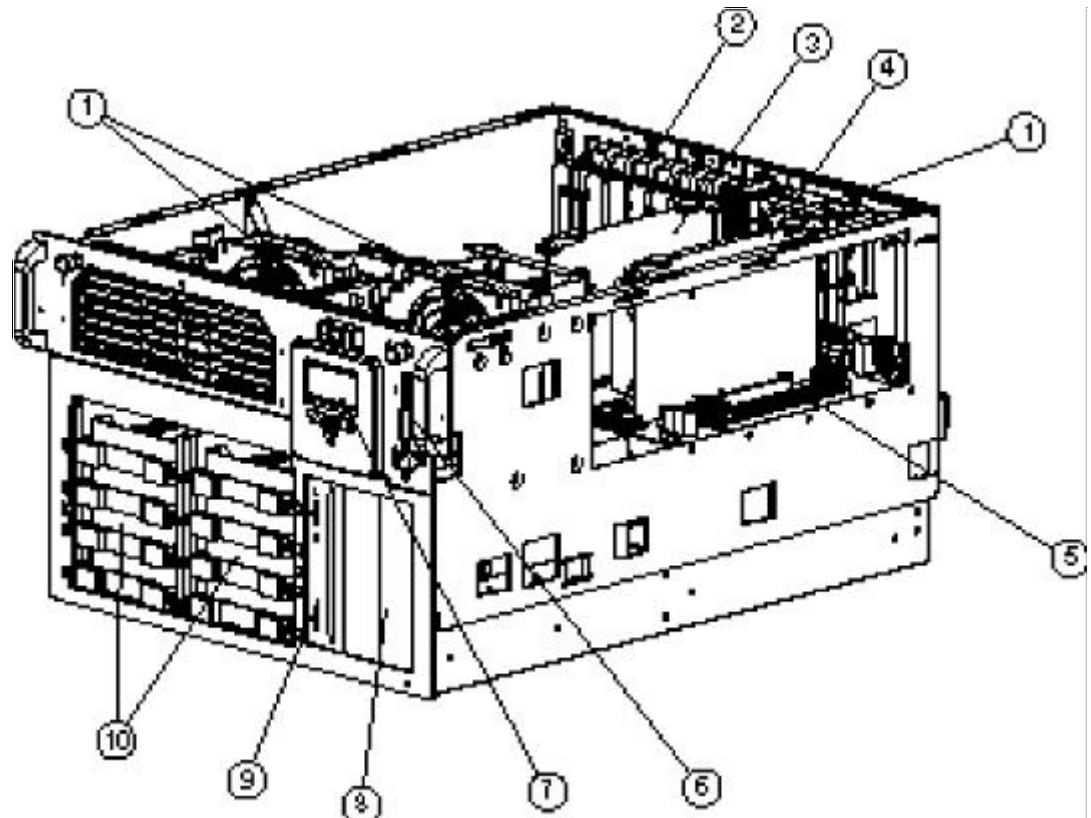

- |                                     |  |
|-------------------------------------|--|
| 1. Fans                             | 6. 3.5" Diskette Drive                 |
| 2. I/O Slot Covers                  | 7. Integrated Management Display (IMD) |
| 3. Memory Board                     | 8. 5.25" Removable Media Bays          |
| 4. Pentium II Processor Board       | 9. 16X Max <sup>2</sup> CD-ROM IDE     |
| 5. System Board DIMM Memory Sockets | 10. Hot-Plug SCSI Drive Cage           |

**COMPAQ**