

OVERVIEW


ProSignia 200
Pentium II Models

BENEFITS AT A GLANCE

- 233-MHz, 266-MHz or 300-MHz Pentium II Processor
- 32-MB Memory standard; expandable to 192 MB using EDO SIMMs or 384 MB using ECC SIMMs
- 512K Level 2 Cache standard
- 1-MB Video Memory upgradable to 2 MB
- Minitower chassis with support for up to 5 drives for increased capacity
- Five total expansion slots 3 PCI, 1 ISA and 1 shared PCI/ISA slot
- Netelligent 10 T/2 100 TX UTP/Coax Controller (embedded)
- Integrated Enhanced IDE Controller on PCI local bus (standard) or Wide-Ultra SCSI-3 Controller supported in a PCI slot
- High performance 16X Max¹ CD-ROM
- Automatic Server Recovery-2 (ASR-2)
- Compaq Insight Manager and SmartStart
- Protected Power Switch to prevent accidental Power-Off
- Protected by Compaq Services, including a three-year on-site limited warranty and extended Pre-Failure Warranty²
- Easy to Service Minitower form factor

¹ Data transfer rate will vary from 50 KB/s to 2400 KB/s.

² Certain restrictions and exclusions apply. Consult the Compaq Customer Support Center for details.

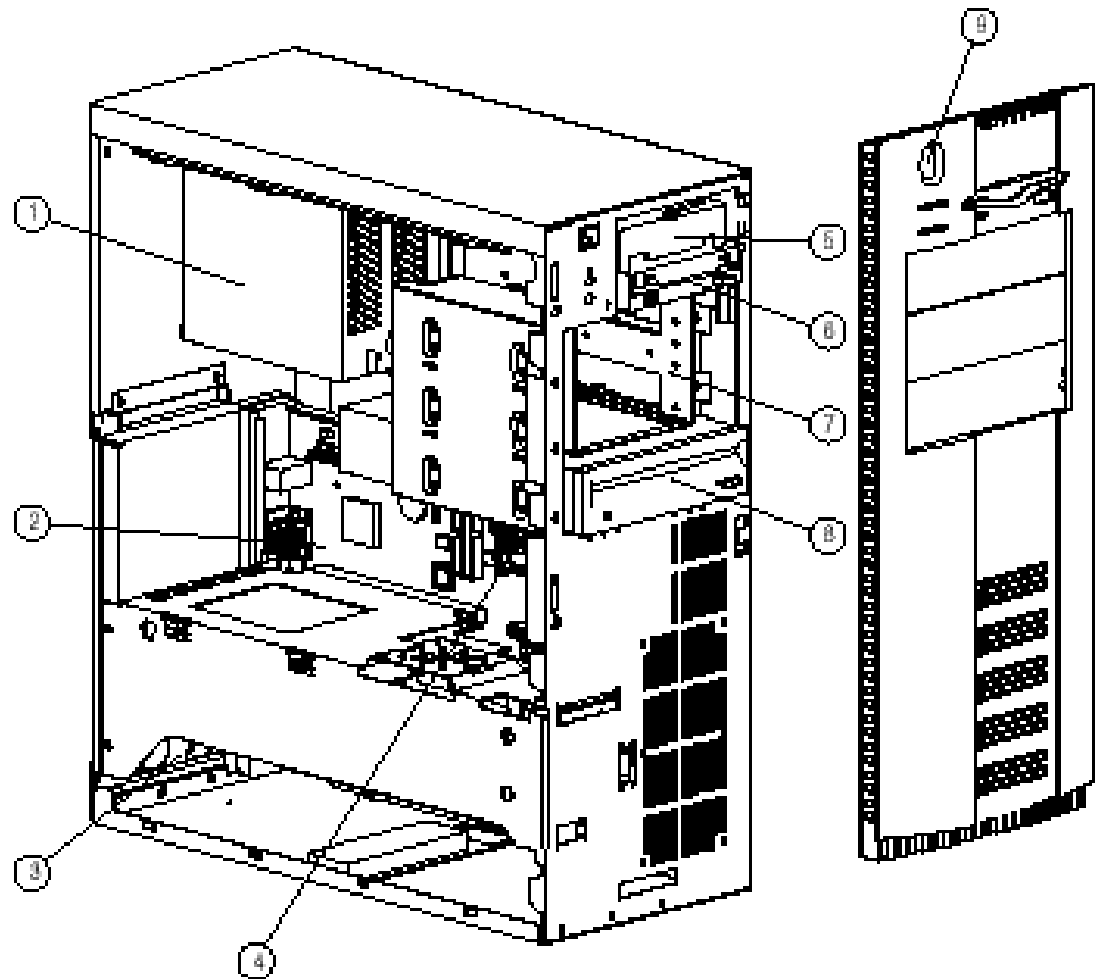

- | | |
|---|--------------------------------|
| 1. 280-Watt Power Factor Corrected Power Supply | 6. 1.44-MB Diskette Drive |
| 2. System Board | 7. Removeable Media |
| 3. Expansion Slots (3 PCI, 1 ISA, 1 shared) | 8. 16X Max ¹ CD-ROM |
| 4. Memory Expansion Sockets | 9. Power Switch |
| 5. SMART EIDE or Wide-Ultra SCSI-3 Hard Drive | |

COMPAQ